

## Tank dispenser Shuttle series


These tanks are made with a small width to be installed directly on the supply island.

### Tank capacity:

- 1350 LITERS
- 2000 LITERS
- 3000 LITERS
- 4000 LITERS
- 5000 LITERS

Containment only /EA v.

With integrated dispenser /GE/EC v.

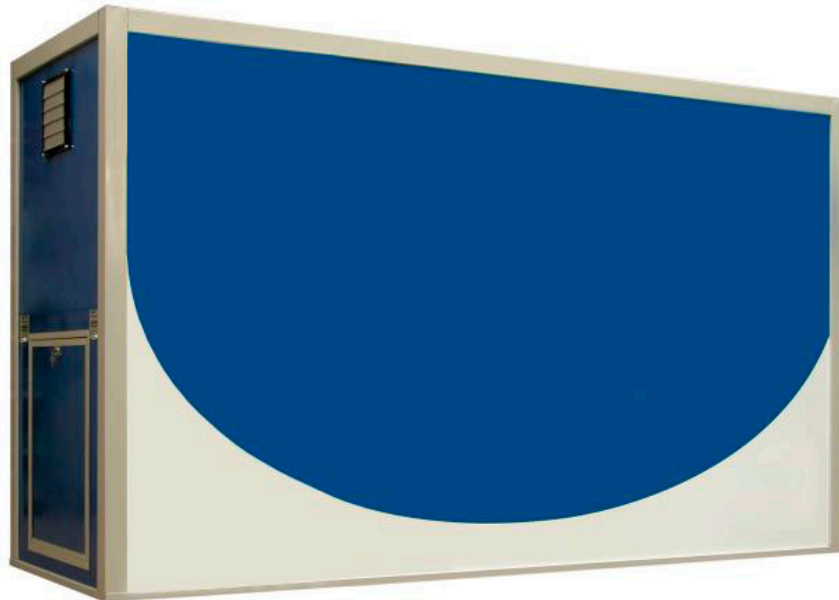

### VERSIONS

- /EA: dispenser or dispensing group absent
- /GE: dispenser for internal non-metrological use
- /EC: dispenser for sale to retail fuel dispenser

## TECHNICAL CHARACTERISTICS

Supporting structure	Galvanized FE430B steel without welding				
Walls and roofing	Insulated panels containing foam layer of self-extinguishing, double-walled polyurethane resins, in pre-painted steel. White color Thickness: 25 mm				
Walkable flooring	Insulated almond aluminum sheet. Thickness: 3 mm + (1.5 mm)				
Handling	By forklift, with empty tank				
Tank material	High density linear polyethylene or stainless steel (on request)				
Tank capacity	1350 l	2000 l	3000 l	4000 l	5000 l
Dimensions EA	0,90x2,50 H1,92 m	0,90x2,60 H1,92 m	1,00x2,75 H2,25 m	1,17x2,94 H2,15 m	1,50x2,94 H2,25 m
Dimensions EC/GE	0,90x2,50 H1,92 m	0,90x2,95 H1,92 m	1,00x3,15 H2,25 m	1,17x3,30 H2,15 m	1,50x3,30 H2,25 m
Weight	450 Kg (single) 600 Kg (double)	500 Kg (single) 650 Kg (double)	600 Kg (single) 700 Kg (double)	700 Kg (single) 800 Kg (double)	750 Kg (single) 850 Kg (double)
Level indicator	Indication of content (in cm and liters)				
Delivery pump	Parts in contact with the product in stainless steel				
Flow rate	40 ÷ 50 l/min				
Power supply	230 VAC single phase				
Maximum current (In)	Max 3 KW				
Pump motor power supply	230 VAC 0,74 KW				
Heating	230 VAC 1200 W				
Ventilation	230 VAC 60 W				
Electronics	24 VAC 50 W				
Operating temperature	-10°C ÷ +40°C (-20°C ÷ +60°C on request)				

## AT30/U INTEGRATED DISPENSER (if present)

Delivery flow rate	2 ÷ 30 l/min
Measurement accuracy	± 1,5 % GE version; ± 0,5% MID EC version
Computing head	CPTH02
System interface	Serial or parallel (see option)
Indicator	6-digit height 1" backlit display
Totalizer	Electronic and electromechanical non-resettable type, 7 digits
Delivery nozzle	Elaflex automatic type ZVA AdBlue® HV for heavy vehicles, ZVA AdBlue® LV for light vehicles
Hose delivery	Length 5,5 m with hose reel
Hose-reel	Made of AISI 304 stainless steel with EPDM gaskets

## CODES

AT28007	Capacity	Containment	Dispenser	Dispenser type
	/135: 1350 l /200: 2000 l /300: 3000 l /400: 4000 l /500: 5000 l	/V: with containment basin /N: without containment tankbasin	/EA: dispenser or delivery group absent /GE: dispenser for internal non-metrological use /EC: dispenser for sale to retail fuel dispenser	/SF: single frontal /SD: single right /SS: single left /DD: double /AX: alternate

AX: AA (Alternate Double Sided (1 nozzle for side)), AS (Alternate Single Sided Left), AD (Alternate Single Sided Right), AF (Alternate Single Sided Front), AB (Alternate Double Sided (2 nozzles for side))

Specifica soggetta a modifiche senza preavviso